


ROOFING SELECTION GUIDE

Luxury, Designer
& Traditional
Roofing Shingles

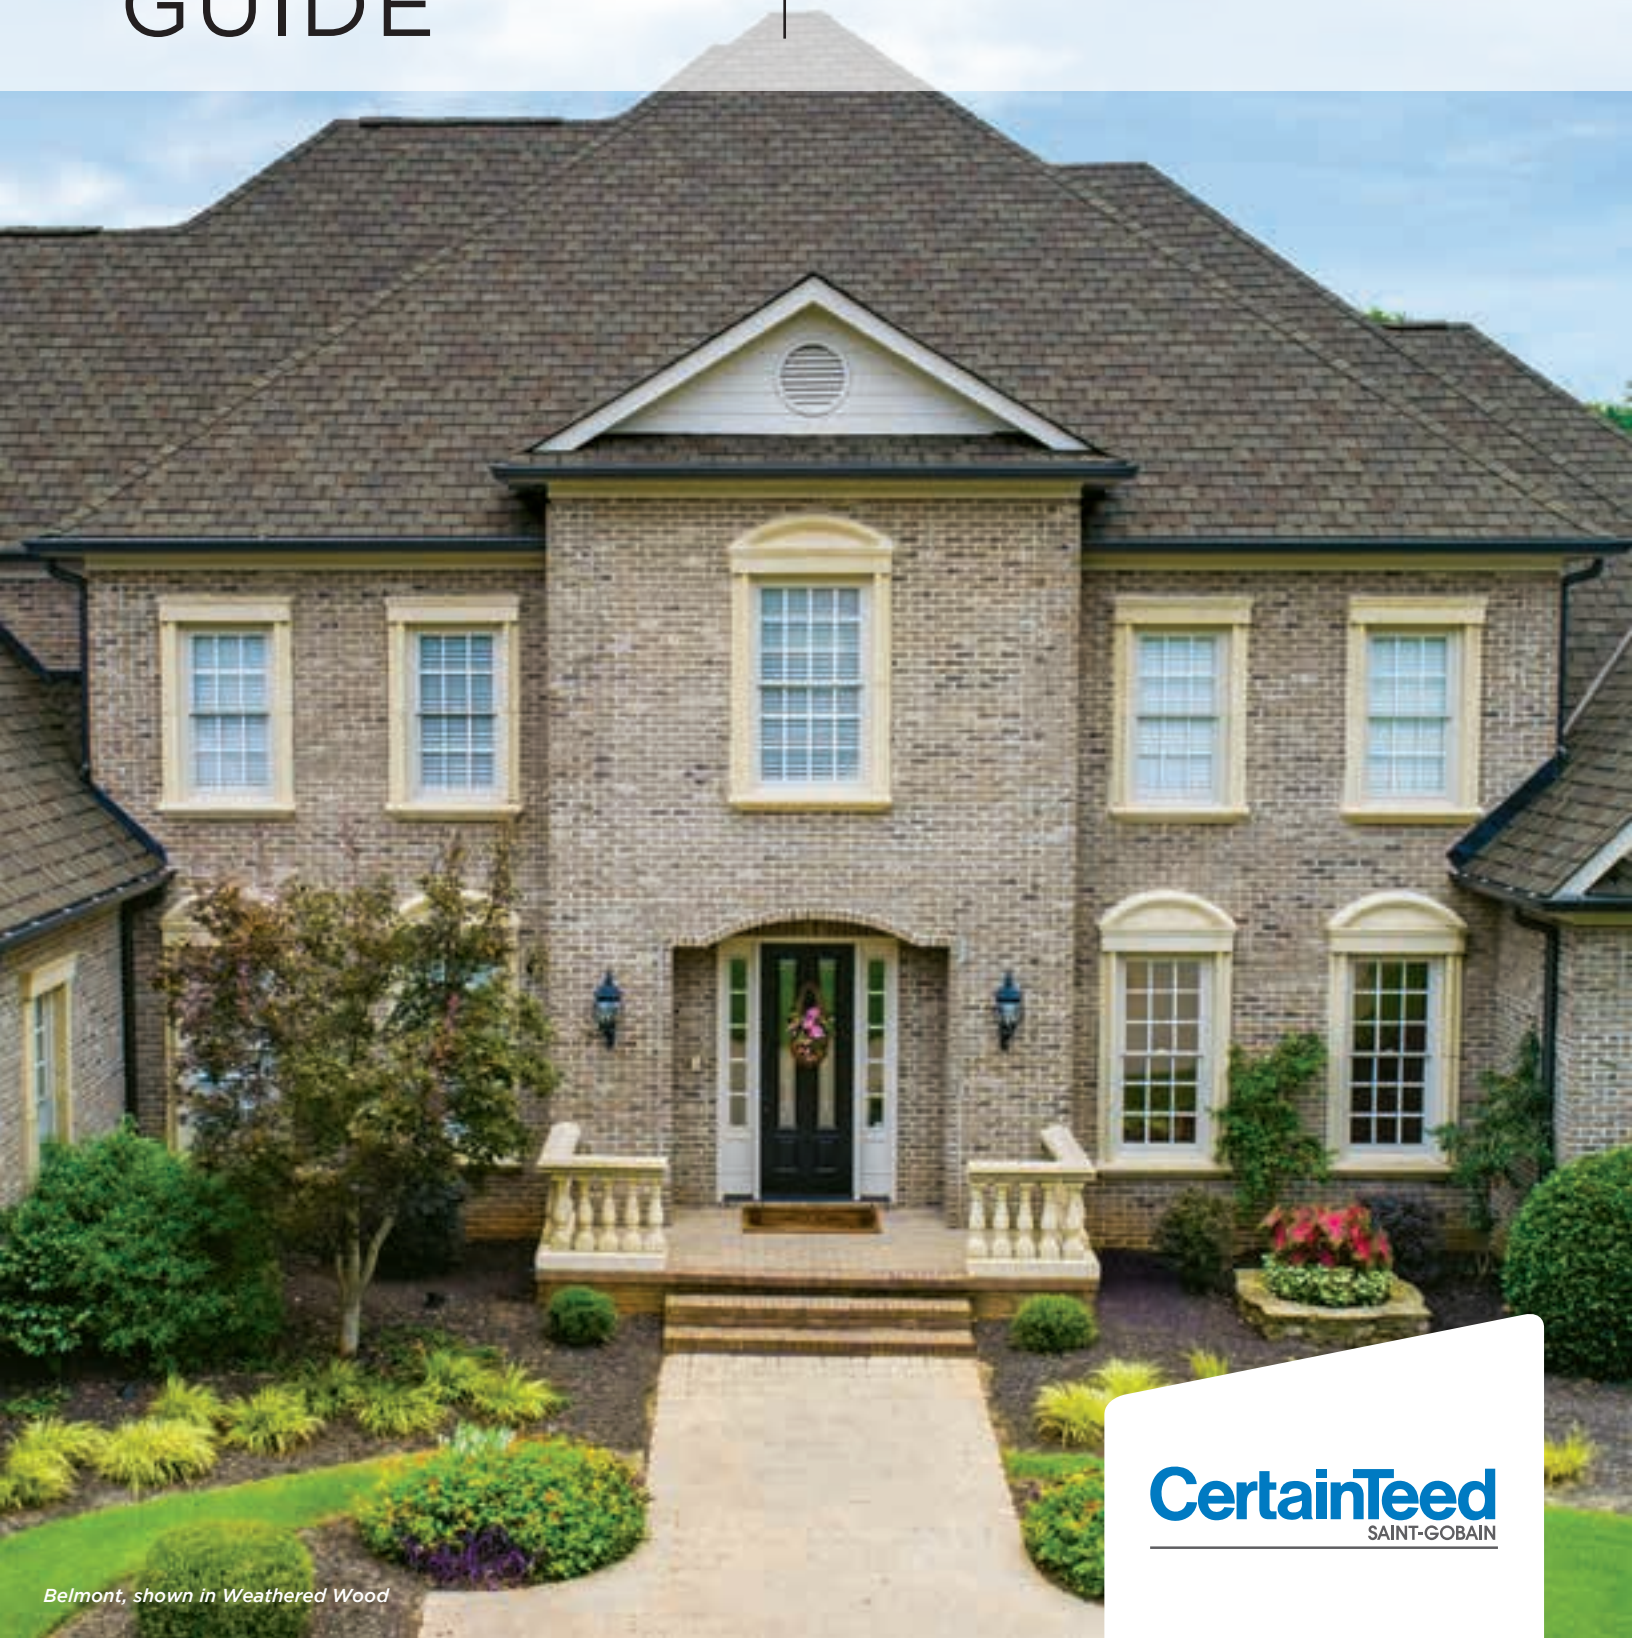

Belmont, shown in Weathered Wood

CertainTeed
SAINT-GOBAIN



NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.



You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess,
when you can be **Certain?**

CertainTeed
SAINT-GOBAIN

LUXURY SHINGLES



Grand Manor, shown in Brownstone

GRAND MANOR®

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5


Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537


COLOR AVAILABILITY

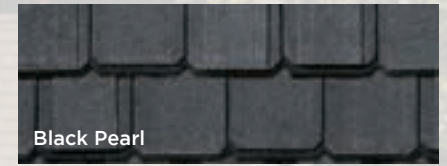


Black Pearl

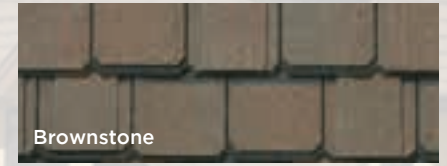


Brownstone

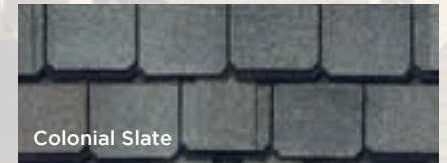


Colonial Slate

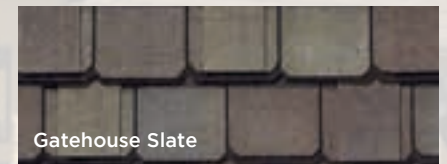


Gatehouse Slate

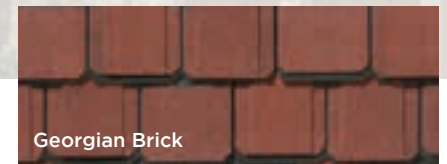


Georgian Brick

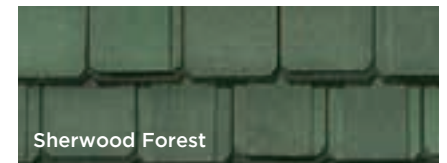


Sherwood Forest

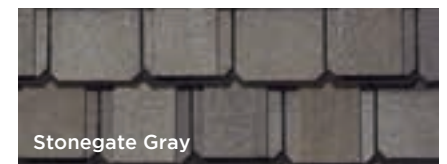


Stonegate Gray

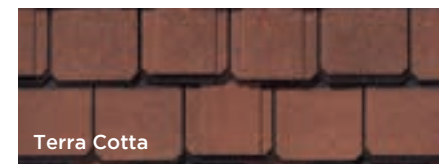

Terra Cotta

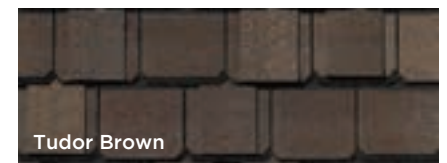

Tudor Brown

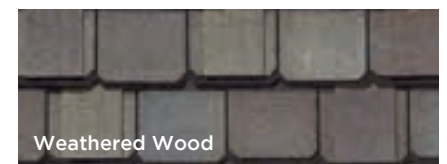


Weathered Wood

LUXURY SHINGLES




Belmont, shown in Black Granite

COLOR AVAILABILITY

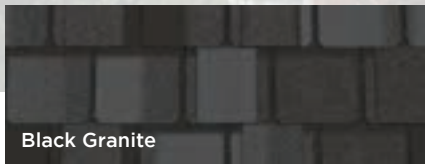

Black Granite

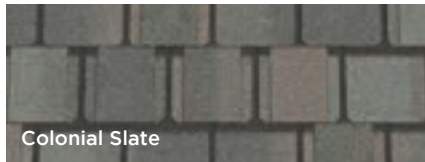


Colonial Slate




Gatehouse Slate



Shenandoah

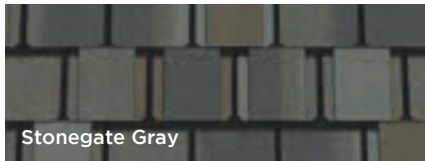

Stonegate Gray

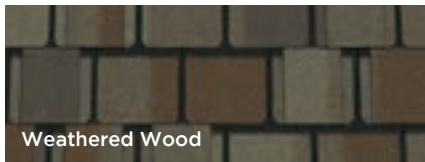

Weathered Wood

BELMONT®

- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:


- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

LUXURY SHINGLES



Carriage House, shown in Stonegate Gray


COLOR AVAILABILITY

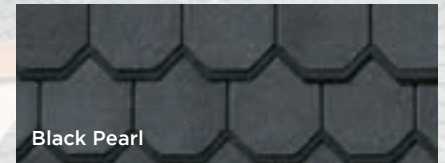


Black Pearl



Brownstone

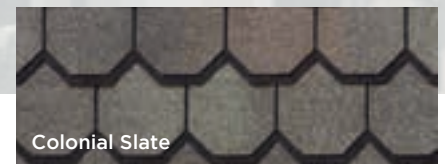


Colonial Slate

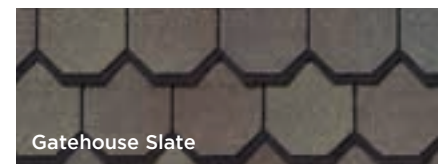


Gatehouse Slate




Georgian Brick

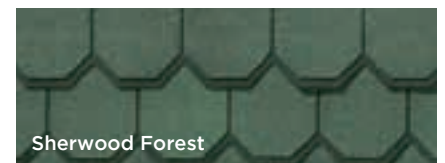

Sherwood Forest

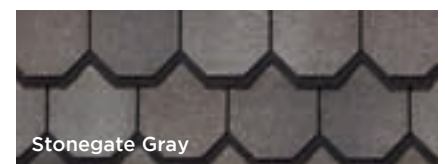

Stonegate Gray

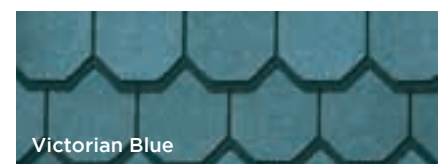

Victorian Blue

CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR and CARRIAGE HOUSE SHINGLES


These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

LUXURY SHINGLES




Presidential Shake TL, shown in Charcoal Black


COLOR AVAILABILITY

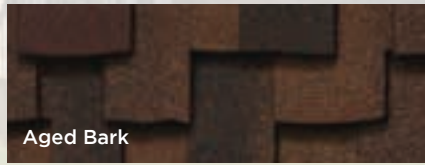


Aged Bark

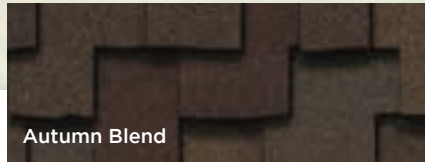

Autumn Blend

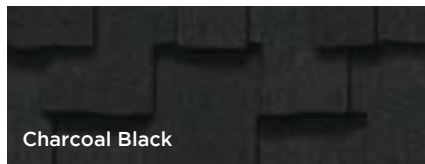


Charcoal Black

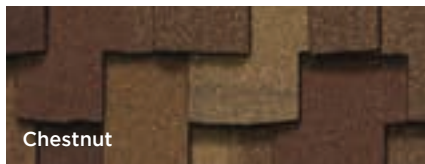


Chestnut



Classic Weathered Wood

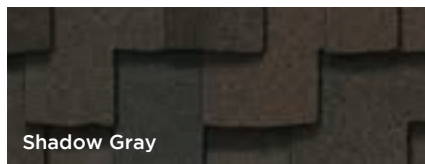

Shadow Gray

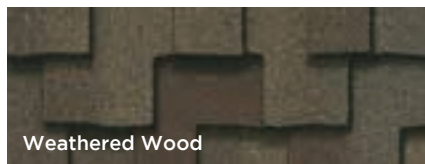

Weathered Wood

PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5


Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:








- ICC-ES-ESR-1389 & ESR-3537

LUXURY SHINGLES

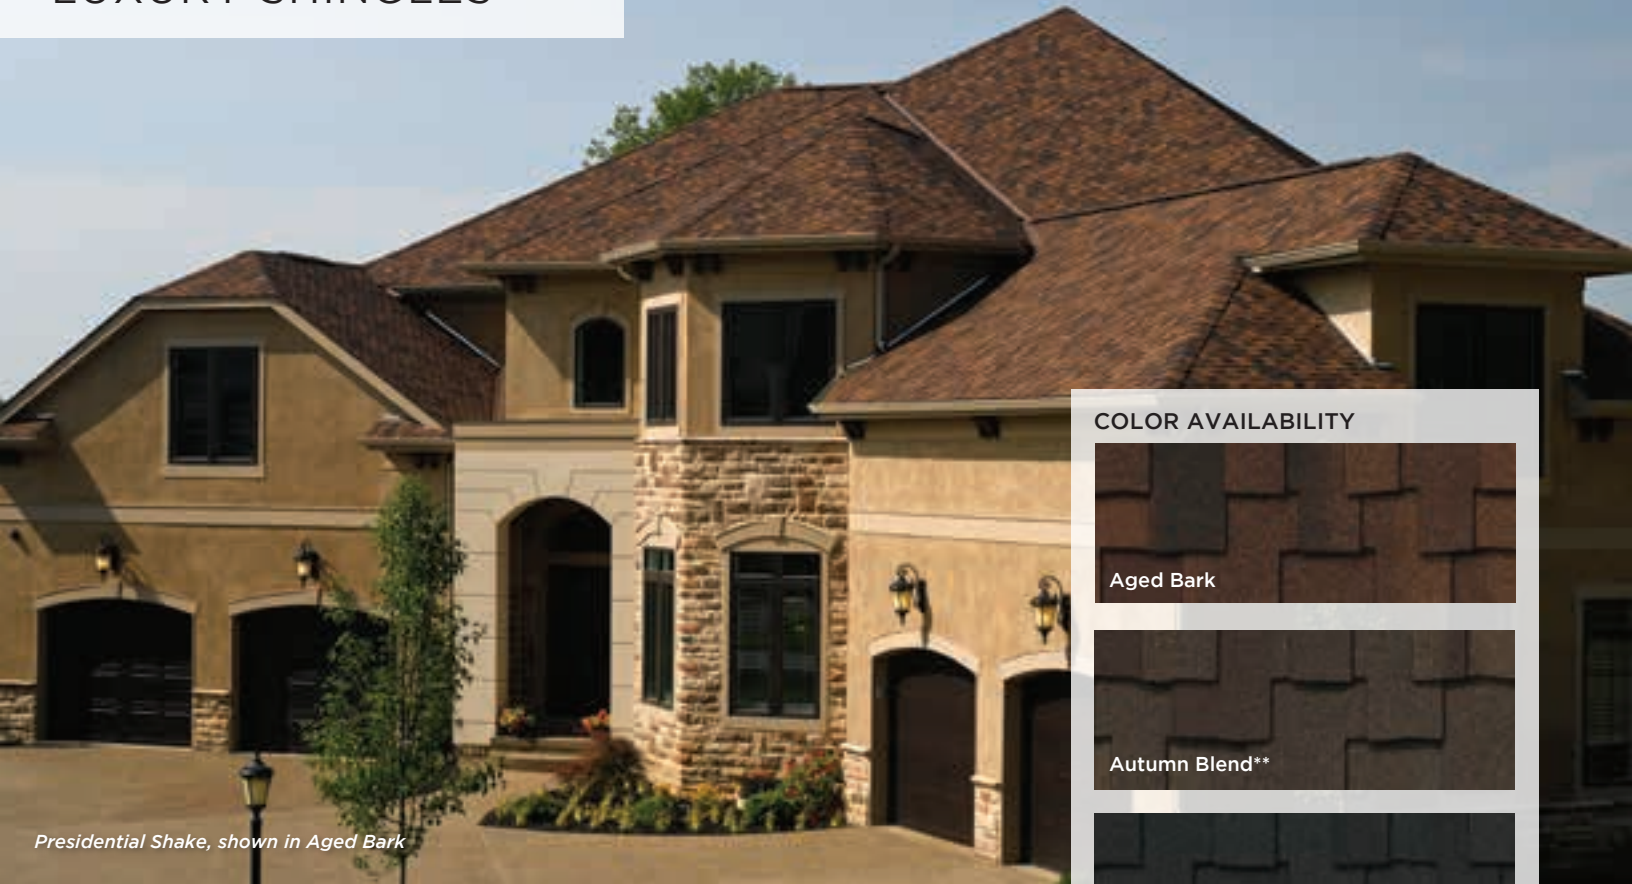

Presidential Shake, shown in Aged Bark

COLOR AVAILABILITY

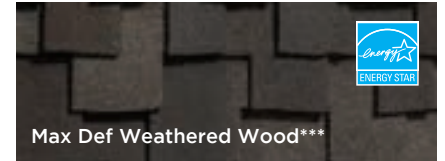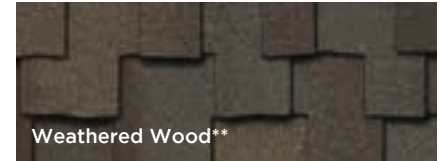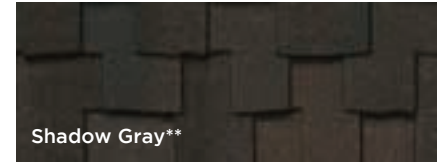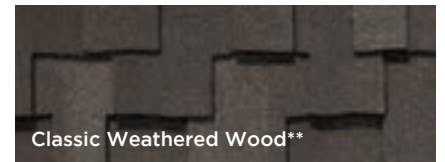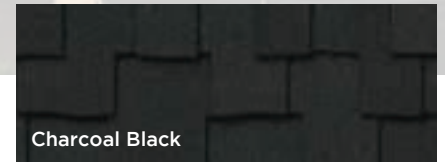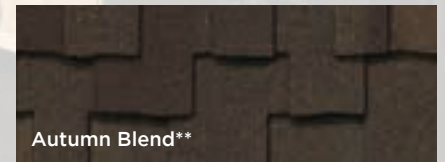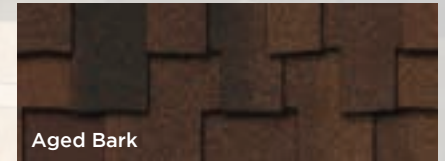

PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

** Color available in impact resistant version.

*** ENERGY STAR qualified product called Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- Select colors (**) available in version that meets UL2218 Class 4

Wind Driven Rain Resistance:







- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

DESIGNER SHINGLES

COLOR AVAILABILITY

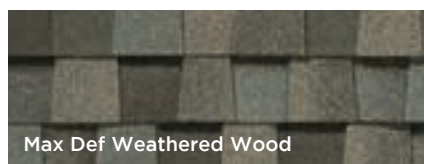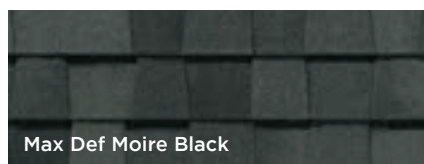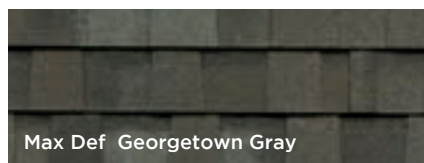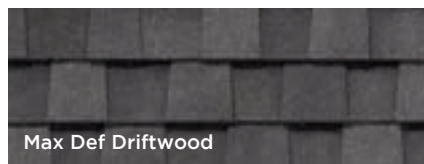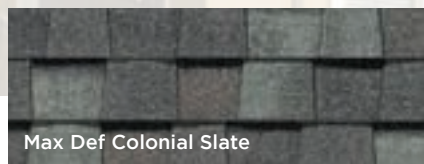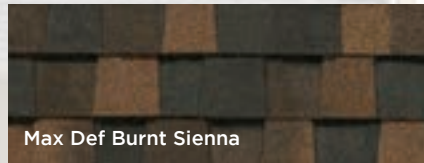

Landmark Premium, shown in Max Def Weathered Wood

LANDMARK® PREMIUM

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 300 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:















- ICC-ES-ESR-1389 & ESR-3537

DESIGNER SHINGLES



Landmark Pro, shown in Max Def Moire Black

COLOR AVAILABILITY



LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

* See warranty for specific details and limitations.



As ranked by a leading Consumer Magazine.

DESIGNER SHINGLES

COLOR AVAILABILITY




Atlantic Blue




Granite Gray



Birchwood




Heather Blend




Burnt Sienna




Hunter Green




Charcoal Black




Moire Black




Colonial Slate




Pewterwood



Cobblestone Gray




Resawn Shake



Cottage Red




Silver Birch



Driftwood



Weathered Wood



Georgetown Gray



Landmark, shown in Georgetown Gray

LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 228 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



DESIGNER SHINGLES






Landmark Solaris Gold, shown in Max Def Weathered Wood

COLOR AVAILABILITY

LANDMARK SOLARIS GOLD

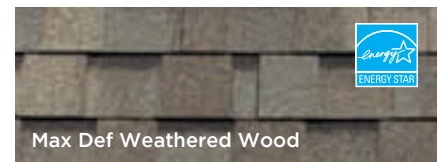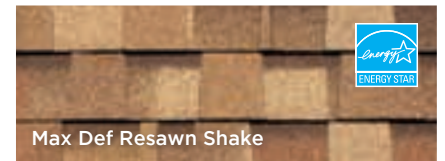

LANDMARK SOLARIS PLATINUM

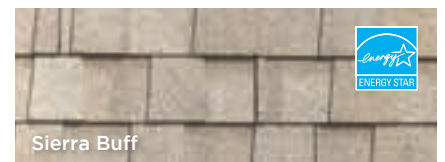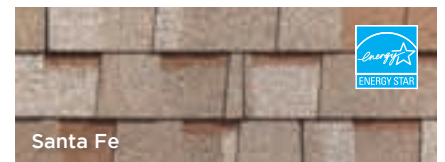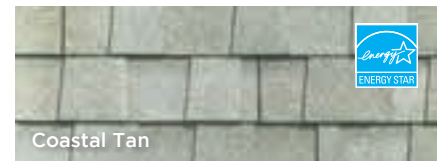

LANDMARK SOLARIS[®]

Solar Reflective Shingles

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter[®] algae-resistance warranty
- NailTrak[®] extra-wide nailing area for accurate installation
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data







| Product | Color | CRRC Rated Product Directory | | | | | | CA 2016 Title 24* | Energy Star Certified |
|--|------------------------|------------------------------|------|-------------------|------|------------------------|------|-------------------|-----------------------|
| | | Solar Reflectance | | Thermal Emittance | | Solar Reflective Index | | | |
| | | Initial | Aged | Initial | Aged | Initial | Aged | | |
| Landmark Solaris [®] Gold | Max Def Resawn Shake | 0.26 | 0.25 | 0.88 | 0.90 | 26 | 25 | YES | YES |
| Landmark Solaris [®] Gold | Max Def Weathered Wood | 0.25 | 0.24 | 0.90 | 0.89 | 25 | 24 | YES | YES |
| Landmark Solaris [®] Platinum | Coastal Tan | 0.40 | 0.36 | 0.91 | 0.90 | 45 | 40 | YES | YES |
| Landmark Solaris [®] Platinum | Santa Fe | 0.40 | 0.35 | 0.90 | 0.91 | 45 | 39 | YES | YES |
| Landmark Solaris [®] Platinum | Sierra Buff | 0.41 | 0.37 | 0.92 | 0.90 | 47 | 41 | YES | YES |

* Can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.




Roof - Highland Slate, shown in Fieldstone
Siding - Cedar Impressions® Double 7" Perfection Shingles, shown in Seagrass

COLOR AVAILABILITY

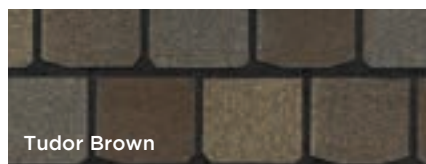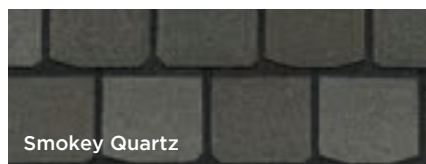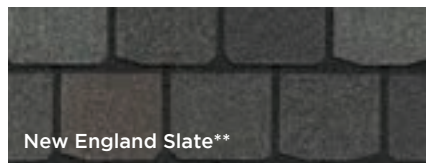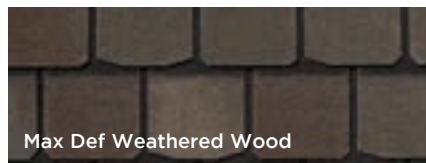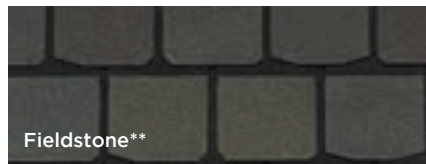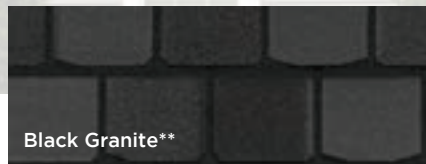

HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select colors**) 

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Impact Resistance:

- Select colors (**) available in version that meets UL2218 Class 4

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:


- ICC-ES-ESR-1389 & ESR-3537

DESIGNER SHINGLES



NorthGate, shown in Max Def Moire Black


COLOR AVAILABILITY

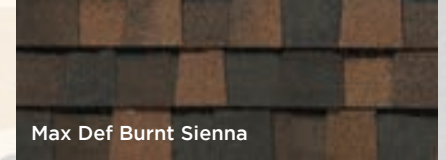


Max Def Burnt Sienna




Max Def Driftwood

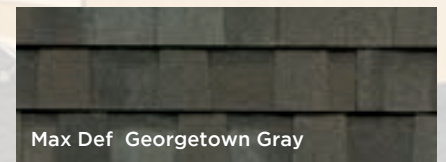


Max Def Georgetown Gray

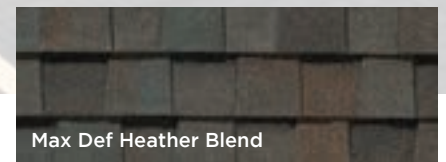


Max Def Heather Blend

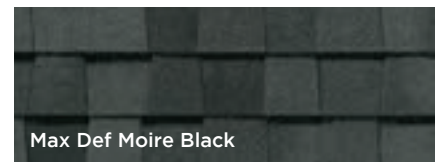


Max Def Moire Black

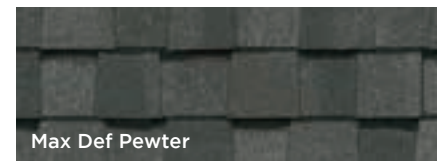


Max Def Pewter

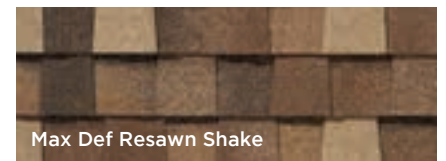

Max Def Resawn Shake

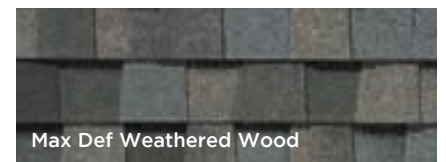

Max Def Weathered Wood

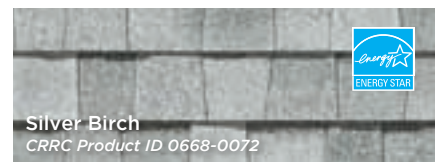

Silver Birch
CRR Product ID 0668-0072

NORTHGATE®

- Two-piece laminated fiberglass-based construction
- Greater cold-weather flexibility, increased ductile properties, increased granule adhesion and enhanced crack resistance
- Classic shades and dimensional appearance of natural wood or slate
- 270 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 4



Quality Standards:


- ICC-ES-ESR-1389 & ESR-3537

TRADITIONAL SHINGLES



Patriot, shown in Graystone


COLOR AVAILABILITY

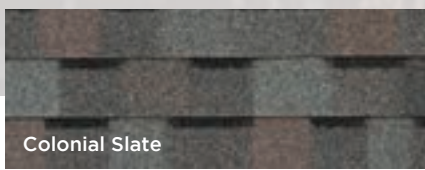


Colonial Slate




Driftwood

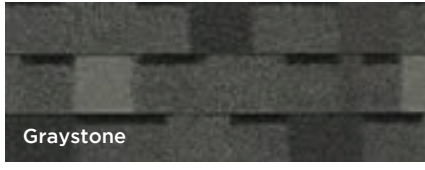


Graystone

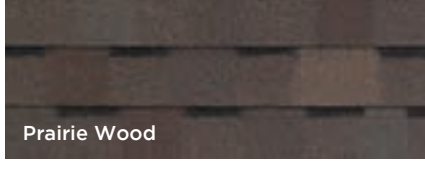

Prairie Wood

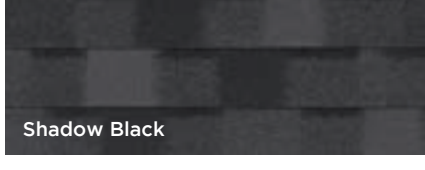

Shadow Black

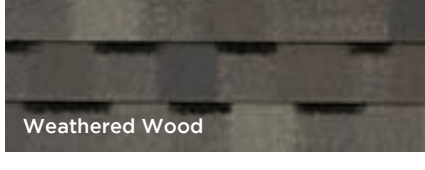

Weathered Wood

PATRIOT PRODUCT ONLY AVAILABLE IN SELECT AREAS.


- Architectural style shingles
- Single layer fiber glass-based construction
- Intricate color blend drops combined with intermittent shadow lines
- 215 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 8-year SureStart™ protection
- 10-year 110 mph wind-resistance warranty

** See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

- Fire Resistance:**
 - UL Class A
 - UL certified to meet ASTM D3018 Type 1
- Wind Resistance:**
 - UL certified to meet ASTM D3161 Class F
 - UL certified to meet ASTM D7158 Class H
- Tear Resistance:**
 - UL certified to meet ASTM D3462
 - CSA standard A123.5
- Quality Standards:**
 - ICC-ES-ESR-1389 & ESR-3537

TRADITIONAL SHINGLES

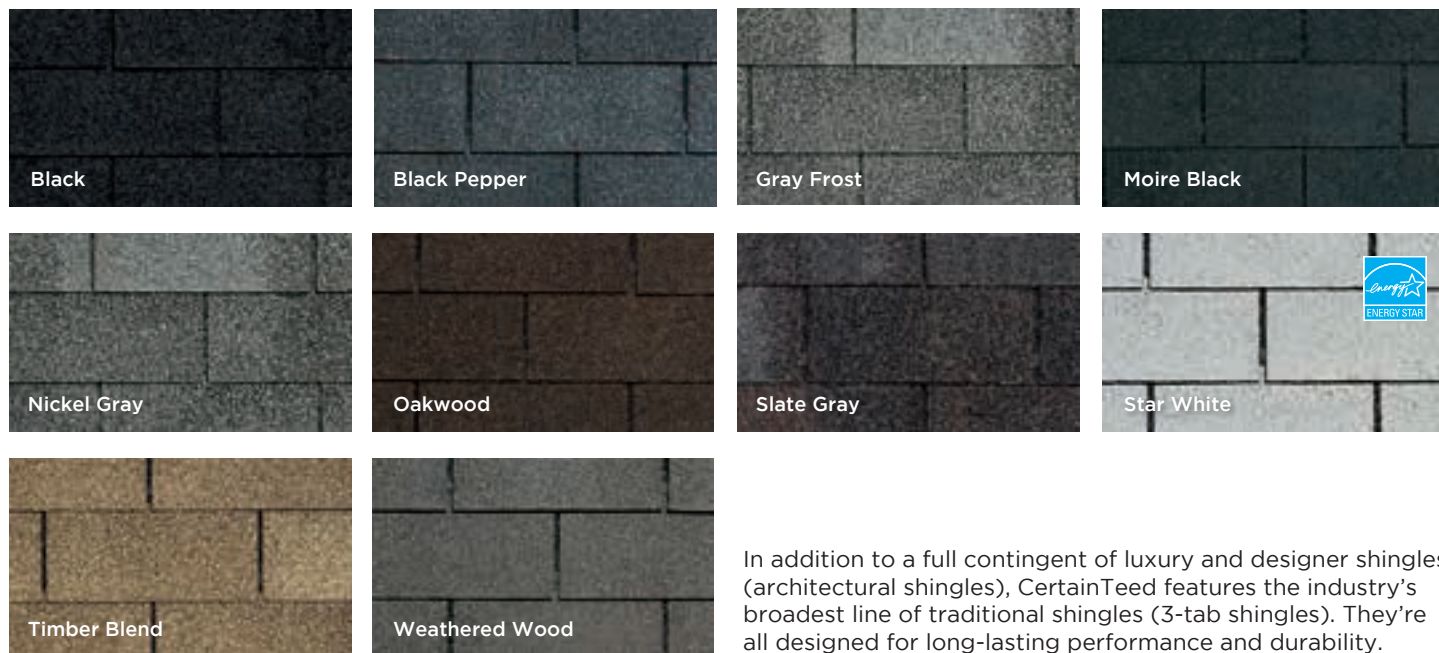

In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CERTAINTEED XT™ 25 COLORS ONLY AVAILABLE IN U.S.

- Fiberglass composition
- Designed for long-lasting performance and durability
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

| | |
|--------------|----------------|
| Black | Oakwood |
| Black Pepper | Slate Gray |
| Gray Frost | Star White |
| Moire Black | Timber Blend |
| Nickel Gray | Weathered Wood |

CERTAINTEED XT™ 25 METRIC

- Fiberglass composition
- Designed for long-lasting performance and durability
- 220 lbs. (100 kg) per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Black
Moire Black
Oakwood
Weathered Wood

AVAILABLE IN CENTRAL AND SE PA.,
AND SOUTHERN NJ AREAS ONLY

TRADITIONAL SHINGLES

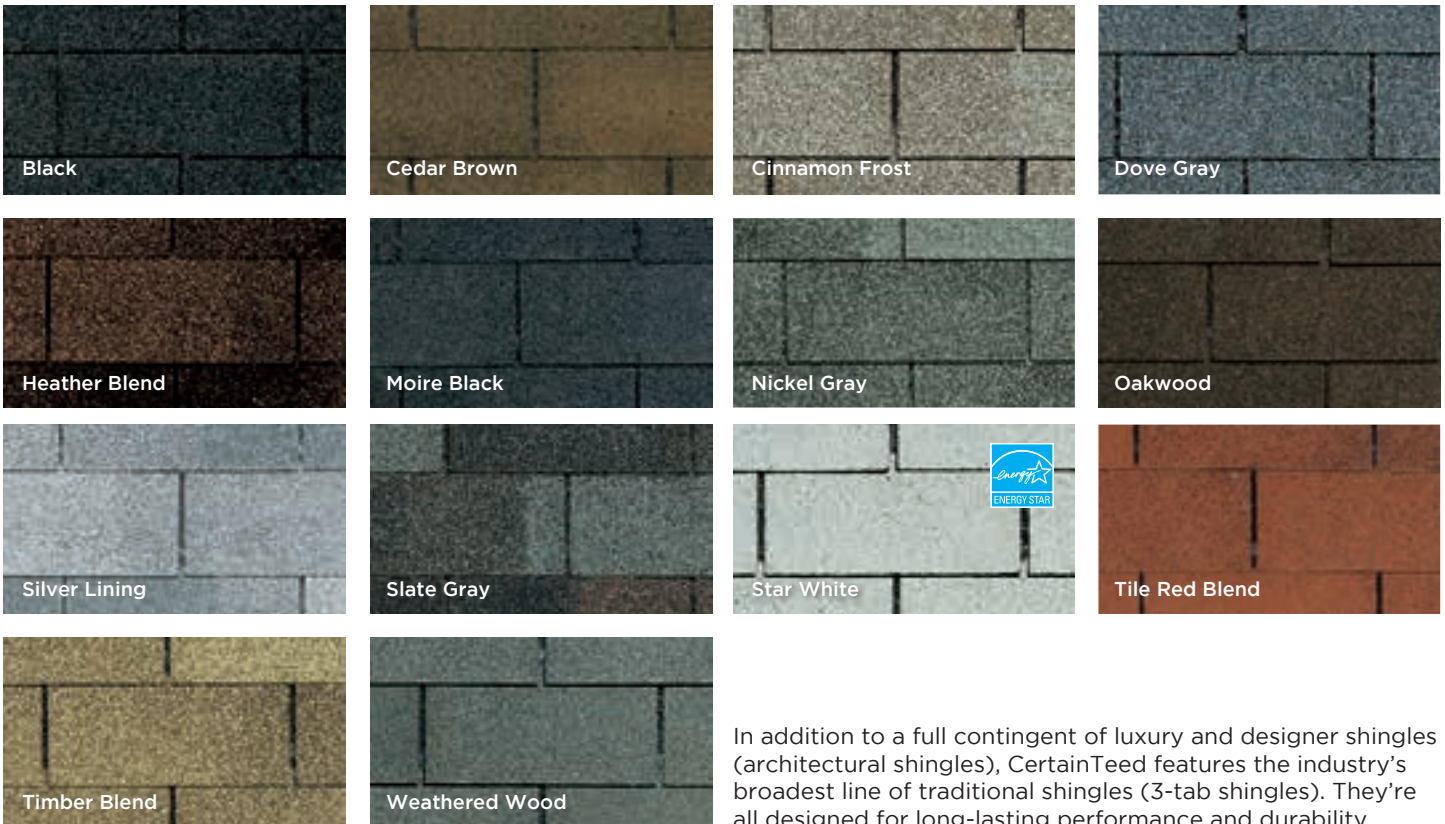

In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CT™ 20

- Fiberglass composition
- 194 lbs. per square
- 20-year limited transferable warranty*
- 3-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Cedar Brown Moire Black
Dove Gray Weathered Wood

CERTAINEED XT™ 25

- Fiberglass composition
- 203 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Black Moire Black Star White
Cedar Brown Nickel Gray Tile Red Blend
Cinnamon Frost Oakwood Timber Blend
Dove Gray Silver Lining Weathered Wood
Heather Blend Slate Gray

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- Algae resistant



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)




Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



12" NorthGate® Accessory


- Hip and ridge for NorthGate shingles

Technology that protects the beauty of your roof and strengthens its performance.

NAILTrak® Shingle Technology

The bond that holds it together.

For more than a decade, NailTrak has improved shingle installation by providing a nailing area three times wider than that of a typical laminate shingle. This increases efficiency and accuracy in installation, providing homeowners greater peace of mind. Landmark® shingles also feature our specially-formulated Quadra-Bond® adhesive, providing industry-leading resistance to delamination. Together, our NailTrak and Quadra-Bond technologies deliver the strength and durability that allow your roof to stand the test of time.

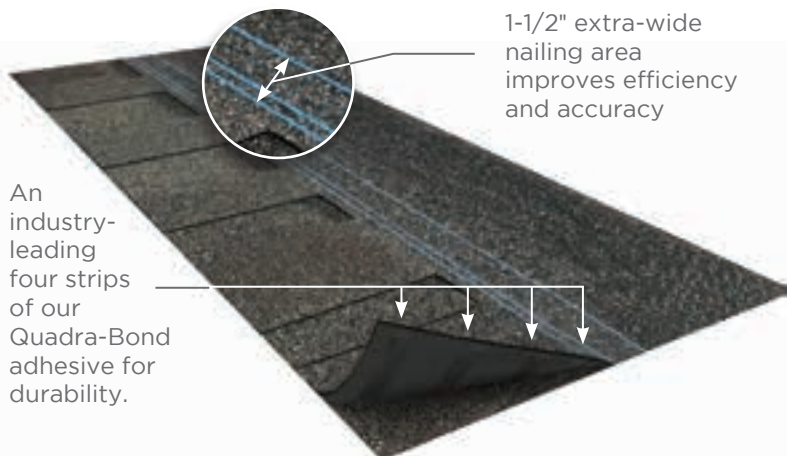


STREAKFighter® Algae-Resistant Shingle Technology

The ultimate in stain protection.

Those streaks you see on other roofs in your neighborhood? That's algae, and it's a common eyesore on roofing throughout North America. CertainTeed's StreakFighter technology uses the power of science to repel algae before it can take hold and spread. StreakFighter's granular blend includes naturally algae-resistant copper, helping your roof maintain its curb appeal and look beautiful for years to come.


Granule with StreakFighter Technology

- Ceramic coating
- Copper layer
- Mineral core

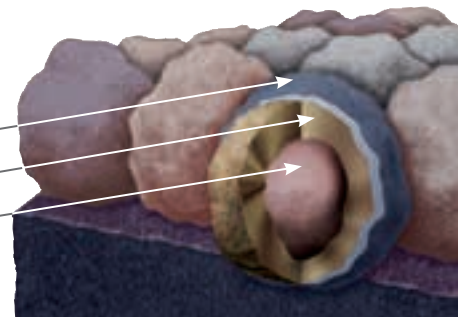

Underlayment Protection

WINTERGUARD®

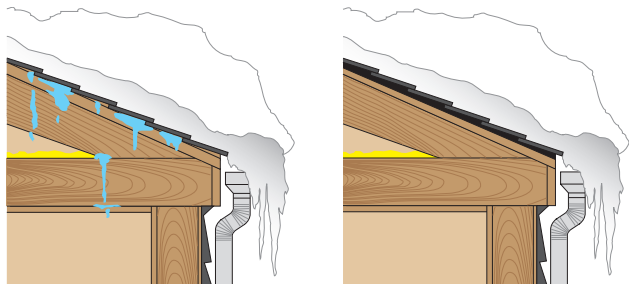

When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970. For specific details and limitations, refer to the actual product warranties.

ROOFERS' SELECT®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt. It lays flat and is extremely resistant to wrinkling, reduces the likelihood of slipping for increased safety, doesn't tear away from fasteners when walked on or in strong wind and meets underlayment requirements for the CertainTeed Integrity Roof System™.

DIAMONDDECK®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

ROOFRUNNER®

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.

METALAYMENT®

MetaLayment self-adhering underlayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

SureStart™ Protection



Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

| Lifetime Limited Warranty Shingles Coverage | 3-STAR Protection 20 years | 4-STAR Protection 50 years* | 5-STAR Protection 50 years** |
|---|-------------------------------|--------------------------------|---------------------------------|
| Materials & Labor | ✓ | ✓ | ✓ |
| Tear-off | ✓ | ✓ | ✓ |
| Disposal | | ✓ | ✓ |
| Workmanship | | | ✓*** |

NOTE: XT™25, XT™30 IR and Patriot shingles carry 10 years with 3-STAR, 20 years with 4-STAR and 25 years with 5-STAR coverage, including the features as indicated above.

Fully transferable for 10 years with 3-STAR Coverage, 12 years with 4-STAR Coverage, and 15 years with 5-STAR Coverage.

















*Applies to single-family detached houses. Duration for all other types of structures is limited to 25 years.

**Applies to single-family detached houses. Duration for all other types of structures is limited to 30 years.

***Workmanship is covered for 25 years.

Flat Roof Sections: If a CertainTeed Flintlastic self-adhered roof system is part of the job, up to 10 squares will be covered for 12, 15 or 20 years depending upon the specific system installed. Refer to the Commercial Systems Specifications Manual for all other Flintlastic systems.

SELECTION GUIDE

| | | Shingle Construction and Description | Weight (lbs. per square) | UL Class A Fire Resistance Rating | UL Certified to Meet ASTM D3462 | UL Certified to Meet ASTM D3018 Type 1 | UL 2218 Impact Resistance Rating | ASTM D3161 Wind Resistance |
|---|---|--|--------------------------|-----------------------------------|---------------------------------|--|----------------------------------|----------------------------|
| | | | | | | | | |
| LUXURY SHINGLES | | | | | | | | |
| Grand Manor |  | Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied | 425 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Belmont |  | Single layer, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate | 275 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Carriage House |  | Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied | 350 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Presidential Shake TL |  | Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look | 475 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Presidential Shake <small>Impact Resistant Version Available (Select colors)</small> |  | Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look | 355 | ✓ | ✓ | ✓ | Class 4 | Class F, 110 mph |
| Presidential Solaris Gold |  | Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look  | 355 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| DESIGNER SHINGLES | | | | | | | | |
| Landmark Pro |  | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 250 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Landmark Premium |  | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 300 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Landmark |  | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 228 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Landmark Solaris |  | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate  | 250 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| Highland Slate <small>Impact Resistant Version Available (Select colors)</small> |  | Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate | 240 | ✓ | ✓ | ✓ | Class 4 | Class F, 110 mph |
| NorthGate |  | Two-piece laminated fiberglass-based construction; Greater cold-weather flexibility, increased ductile properties. | 270 | ✓ | ✓ | ✓ | Class 4 | Class F, 110 mph |
| Patriot <small>(SELECT AREAS ONLY)</small> |  | Architectural style shingle; Single layer fiberglass-based construction; Intricate color blend drops combined with intermittent shadow lines | 215 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| TRADITIONAL SHINGLES | | | | | | | | |
| XT 25 |  | Fiberglass composition; Designed for long-lasting performance and durability | 203/205 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| XT 25 Metric | | Fiberglass composition; Designed for long-lasting performance and durability | 220 | ✓ | ✓ | ✓ | | Class F, 110 mph |
| CT 20 | | Fiberglass composition; Designed for long-lasting performance and durability | 194 | ✓ | ✓ | ✓ | | Class F, 110 mph |

** Wind warranty upgrade to 130 mph available.

| Miami-Dade Product Control Acceptance | Conforms To CSA Standard A123.5 | Limited Transferable Warranty Against Manufacturing Defects On Residential Applications <small>*50-Year on Group-owned or Commercial Applications</small> | StreakFighter algae-resistance Warranty (where available) | SureStart Protection | Wind-Resistance Warranty <small>Upgraded wind warranty available. See warranty for details and limitations</small> | Shingle Size | Bundles Per Square |
|---------------------------------------|---------------------------------|--|---|----------------------|---|-----------------------------------|--------------------|
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 4 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 6 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 4 |
| ✓ | ✓ | Lifetime | 10-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 3 |
| ✓ | ✓ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 4 |
| | ✓ | 30-year | 10-year | 8-year | 10-year 110 mph | 13 1/4" x 39 3/8" 5 5/8" Exposure | 3 |
| ✓ | | 25-year | 10-year | 5-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |
| ✓ | | 25-year | 10-year | 5-year | 5-year 60 mph | 13 1/4" x 38 3/8" 5 5/8" Exposure | 3 |
| ✓ | | 20-year | | 3-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |

CertainTeed starter and CertainTeed hip and ridge required.

*** With approved underlayment

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Belmont and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- Saves significant installation time

Symphony® Hip and Ridge

- Full line of hip and ridge accessories to complement and enhance the slate-inspired look of Symphony.

Shangle® Ridge Accessory

- Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

- Hip and ridge for Presidential TL, Presidential and Landmark Series; 30 lineal ft. per bundle; 24 shingles per bundle

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal ft. per bundle; 24 shingles per bundle

Cedar Crest®

- Hip and ridge for Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle

12" NorthGate® Accessory

- Hip and ridge for NorthGate shingles

Ventilation

- CertainTeed Ridge Vent 12" filtered
- CertainTeed Rolled Ridge Vent filtered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent



Color Companion Products™ for Flat Roof Areas

With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in ten colors that complement some of the most popular CertainTeed shingles.



What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.


CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

MATTERHORN[®]

Metal Roofing



TILE
Weathered Canyon

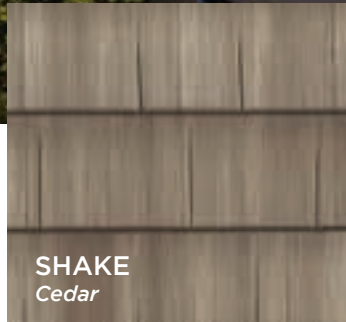

SHAKE
Cedar



SLATE
Brownstone

Because
it's more
than just
a roof


Matterhorn Metal Roofing takes the form of slate, tile or wood shake to create a beautiful roof that makes a lasting impression.

Replicate the charm of artisanal roofing at a fraction of the cost with durable, lightweight steel.

Includes a lifetime limited warranty. Laboratory tested to resist fire, wind and hail.

Features a proprietary multi-coat paint system that offers 17 hyper-realistic color options across all profiles, including 16 CRRC-rated cool roofing colors.

CertainTeed
SAINT-GOBAIN

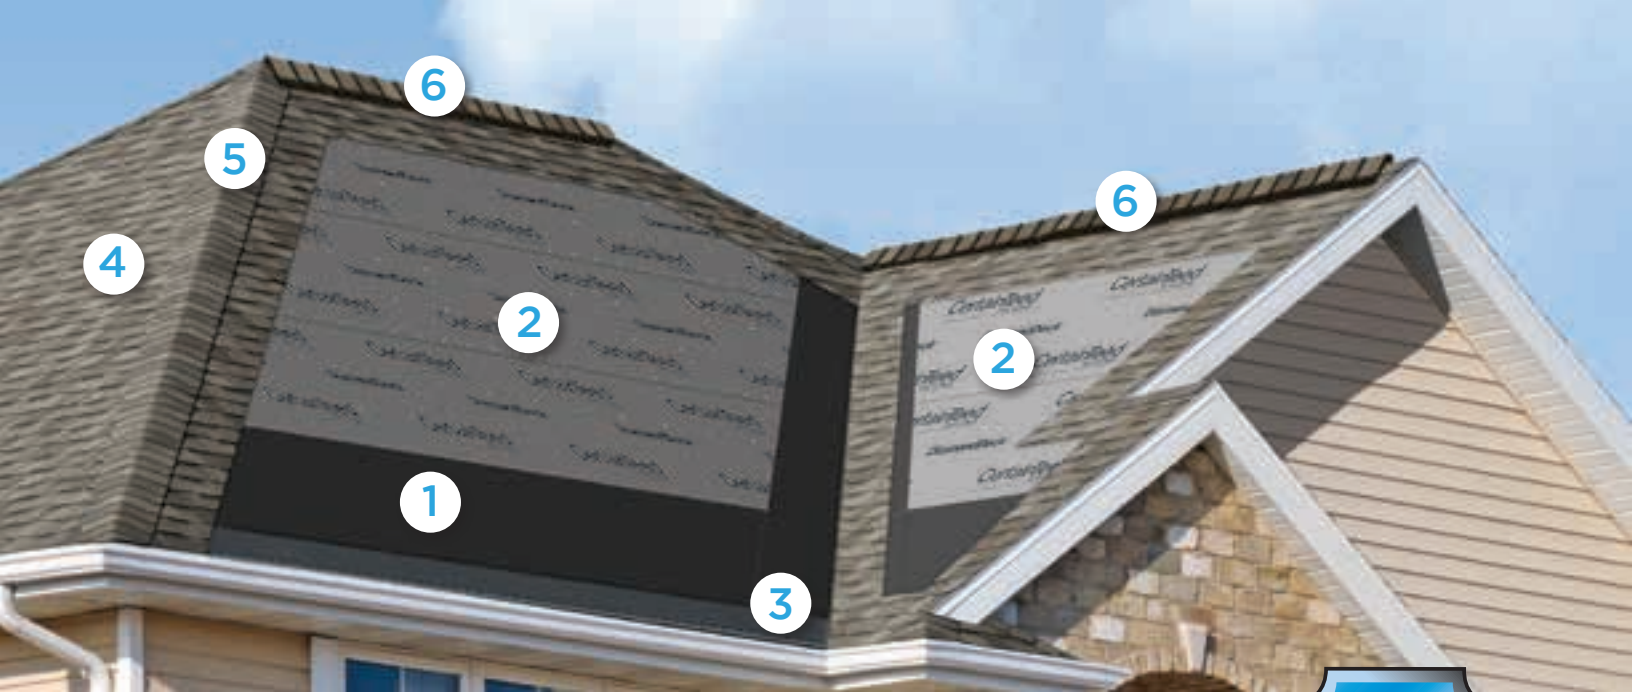

Integrity Roof System™

A COMPLETE APPROACH TO LONG LASTING BEAUTY AND PERFORMANCE



With as much care as you take in selecting the right contractor, choosing the right roof system is equally as important. A CertainTeed Integrity Roof System combines key elements that help ensure you have a well-built roof for long-lasting performance.

1. Waterproofing Underlayment

The first step in your defense against the elements. Self-adhering underlayment is installed at vulnerable areas of your roof to help prevent leaks from wind-driven rain and ice dams.

2. Water-Resistant Underlayment

Provides a protective layer over the roof deck and acts as a secondary barrier against leaks.

3. Starter Shingles

Starter Shingles are the first course of shingles that are installed and designed to work in tandem with the roof shingles above for optimal shingle sealing and performance.

4. Shingles

Choose from a variety of Good-Better-Best styles to complement any roof design and fit your budget.

5. Hip & Ridge Caps

Available in numerous profiles, these accessories are used on the roof's hip and ridge lines for a distinctive finishing touch to your new roof.

6. Ventilation

A roof that breathes is shown to perform better and last longer. Ridge Vents, in combination with Intake Vents, allow air to flow on the underside of your roof deck, keeping the attic cooler in the summer and drier in the winter.

learn more at:

certainteed.com/roofing

Products
available in
areas shown



CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com